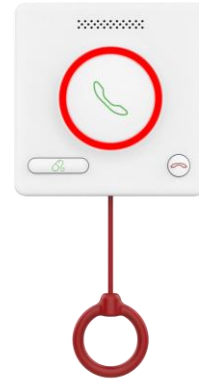


**DS-KHH6020X**  
**Audio Bedhead Terminal**

- One-button calls the center station directly with two way audio intercom
- Multi-buttons support different call types (call, dressing change and cancellation)
- Support wired access to the bathroom emergency alarm button
- 4 alarm zones supported
- Power supply: 12VDC, or POE with POE converter


## ▪ Specification

System parameters	
Operation system	Linux
ROM	16 M
Audio parameters	
Audio input	Built-in omnidirectional microphone, external speaker
Audio compression standard	G.711U
Audio output	Built-in SPK
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Device interfaces	
Alarm input	4
Network interface	1*RJ45
TF card	Not Support TF card
General	
Installation	Wall mounting
Working temperature	-10°C ~ 50°C
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	86mm x 86mm
Application environment	Indoor
Power consumption	≤ 4 W
Power Supply Output	12 VDC

## ▪ Available Model

DS-KHH6020X

## ▪ Dimension

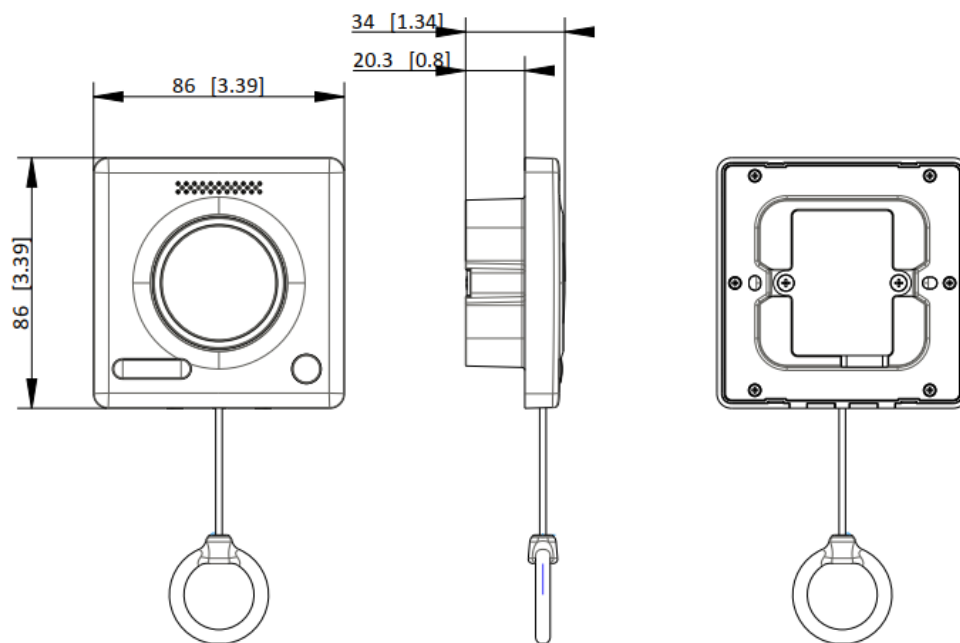

Unit:mm [inch]

SCALE	1:1
-------	-----

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

